

Version:  
December 01, 2022

# DEMINT

## Electronics Co., Ltd.

### (BWW)

# High Precision Wire wound Resistor

**DeMint Electronics Co., Ltd.**

Web: [www.direct-token.com](http://www.direct-token.com)

Email: [rfq@direct-token.com](mailto:rfq@direct-token.com)

**China:** 17P, Nanyuan Maple Leaf Bldg., Nanshan Ave.,  
Nanshan Dist., Shenzhen, Guangdong, China. 518054  
Tel: +86 755 26055363

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan. 248012  
Tel: +886 2981 0109 Fax: +886 2988 7487

## ► Product Introduction

### **(BWW) Precision Power Resistors Operate in Harsh Environments.**

#### **Features :**

- Axial Moulded
- Excellent load life stability
- Insulation, Moisture Proof
- High Precision and reliability
- Meets the Standards of MIL-R-93
- RoHS compliant with 100% lead free

#### **Applications :**

- Electrical loads, Filament dropping
- DC/DC converters, AC/DC inverters
- High-voltage bleeders, Dynamic braking
- Capacitor charging/discharging regulation
- Motor speed controls, Voltage divider networks
- Bias supply, Current shunts, Voltage dropping, Crow-bar circuits

The new BWW series moulded axial leaded wire wound resistors from DeMint use high-purity alumina ceramic cores with wire winding which spot are welded by precision CNC machine tools to ensure total operational consistency throughout.

Also, using advanced encapsulation die/mould technologies, these precision power resistors are encapsulated with epoxy molding compound.

The BWW models possess a wide resistance value from  $0.1\Omega$  to  $39K\Omega$  and meet the stringent requirements of MIL-R-93. Ayrton Perry non-inductive windings are available on request. The BWW precision version has low Ohmic values for current sensing applications.

All versions are miniaturized for better power to dimension ratios and are available in 0.5W to 10W rated power at  $25^{\circ}\text{C}$ . Tolerance is available in  $\pm 0.1\%$ ,  $\pm 0.25\%$ ,  $\pm 0.5\%$ ,  $\pm 1\%$  and  $\pm 2\%$  with TCR  $\pm 25\text{PPM}/^{\circ}\text{C}$ ,  $\pm 50\text{PPM}/^{\circ}\text{C}$  and  $\pm 150\text{PPM}/^{\circ}\text{C}$  which makes them ideally suited for use in precision applications.


The BWW series is RoHS compliant with 100% Sn (lead free) coated terminals. To address your need for technical and economic success in a timely manner, our custom solutions are the best option. Contact us with your specific needs. Or link to DeMint official website "[General Purpose Resistors](#)" for more information.




### Technical Specifications

#### Technical Specifications (BWW)

| Type    | Rated Watts<br>at 25°C<br>(W) | Resistance Range<br>(Ω) |     | Tolerance<br>(%)                        | TCR<br>(PPM/°C)    | Dimensions (Unit: mm) |         |     |      |
|---------|-------------------------------|-------------------------|-----|---|--------------------|-----------------------|---------|-----|------|
|         |                               | Min                     | Max |   |                    | A±0.25                | ΦB±0.25 | Φd  | F    |
| BWW-0.5 | 0.5                           | 0.1                     | 100 | ±0.1<br>±0.25<br>±0.5<br>±1<br>±2<br>±5 | ±25<br>±50<br>±150 | 7.0                   | 3.0     | 0.6 | 27.0 |
| BWW-1   | 1.0                           | 0.1                     | 1K  |   |                    | 11.0                  | 3.0     | 0.6 | 31.0 |
| BWW-3   | 3.0                           | 0.1                     | 10K |   |                    | 15.0                  | 5.2     | 0.8 | 34.0 |
| BWW-4   | 4.0                           | 0.1                     | 15K |   |                    | 18.0                  | 6.5     | 0.8 | 38.0 |
| BWW-5   | 5.0                           | 1                       | 24K |   |                    | 24.0                  | 8.4     | 1.0 | 44.0 |
| BWW-10  | 10.0                          | 1                       | 39K |   |                    | 46.5                  | 10.0    | 1.0 | 66.0 |

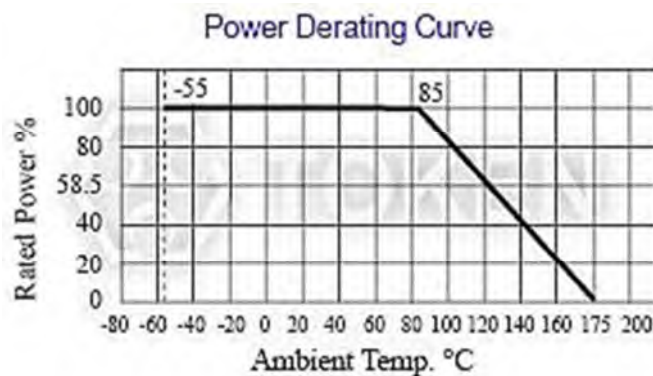

BWW) Power Derating Curve

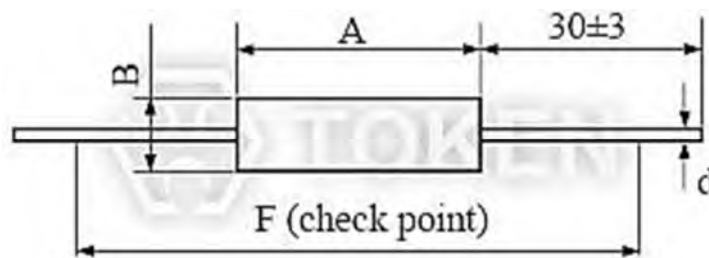

Precision Wire wound (BWW) Dimensions



## Electrical Performance

### Electrical Performance (BWW)

| Test Items                      | Test Conditions                  | Specifications             |
|---------------------------------|----------------------------------|----------------------------|
| Operating Temp. Range           |                                  | -55°C ~ 175°C              |
| Insulation Resistance           | 500V                             | >1GΩ                       |
| Dielectric Withstanding Voltage | 500V AC 1 Min.                   | $\Delta R \leq \pm 0.1\%R$ |
| Load Life                       | 70°C on~off cycle 1000 Hrs.      | $\Delta R \leq \pm 1\%R$   |
| Moisture-Proof Load Life        | 40°C 95% RH on~off cycle 21 Hrs. | $\Delta R \leq \pm 0.2\%R$ |
| Resistance to soldering heat    | 350°C, 3.5s                      | $\Delta R \leq \pm 0.1\%R$ |
| Solderability                   | 235±5°C, 5s(solder bath method)  | IEC68-2-20(1968)           |

## Application Notes

### Application Notes of Wire wounds (BWW)

- When being used in AC circuits, some wirewound structures give inductance ingredients or parasitic capacity, so they may cause unusual phenomena such as oscillations etc. Quorum deviations of other components should be carefully taken into account for use.
- Application and Placement: Wire wound resistors use different gauges of wire as resistance elements. Sometimes the gauge is extremely thin (finer than a strand of human hair) and very susceptible to breakage in environments containing salts, ash, dust and corrosives. Avoid utilization in such environments.
- Do not install in dusty areas because the accumulation will cause shorts and poor conductance.

## Order Codes

### Order Codes (BWW)

| BWW         | - | 1W              | 100R                 | F                        | D            | P       |
|-------------|---|-----------------|----------------------|--------------------------|--------------|---------|
| Part Number |   | Rated Power (W) | Resistance Value (Ω) | Resistance Tolerance (%) | TCR (PPM/°C) | Package |
| BWW         |   |                 | 0R1 0.1Ω             | B ±0.1%                  | C ±25PPM/°C  | P Bulk  |
|             |   |                 | 100R 100Ω            | C ±0.25%                 | D ±50PPM/°C  |         |
|             |   |                 | 1K 1000Ω             | D ±0.5%                  | K ±150PPM/°C |         |
|             |   |                 |                      | F ±1%                    |              |         |
|             |   |                 |                      | G ±2%                    |              |         |





## ► General Information

### General Purpose Resistors with Customized Service

DeMint Electronics is expanding business to include a broad range of General Purpose Resistor products designed for high volume applications. This expanded range of commercial resistor presents a more comprehensive product offering for Customer Experience Management (CEM) and other high volume customers that require quality products at competitive pricing.

Backed by the same customer service, technical support and quality assurance that DeMint has always provided, these new commercial products enable you the opportunity to source a wider range of resistors from a trusted supplier.

### General Use

When an ambient temperature exceeds a rated ambient temperature, resistor shall be applied on the derating curve by derating the load power. General purpose resistor under overloads is not combustion resistant and is likely to emit, flame, gas, smoke, red heat, etc. Flame retardant resistor generally emits smoke and red heat in a certain power and over but do not emit fire or flame.

When resistors are shielded or coated with resin etc., stress from the storage heat and the resins are applied. So, performance and reliability should be checked well before use.

When a voltage higher than rated is applied in a short time (single pulse, repeated pulses, surge, etc.), it does not necessarily ensure safety that an effective wattage is not higher than a rated wattage. Then consult with us with your specified pulse wave shape. Resistors shall be used in a condition causing no dew condensation.

Keep temperature from rising by choosing resistor with a higher rated capacity; do not use a component having the exact load value required. For considerations of safety in extended period applications, the rating should be more than four times higher than the actual wattage involved, but never use resistors at less than 25% of its rated power.

In applications where resistors are subject to intermittent current surges and spikes, be sure in advance that the components selected are capable of withstanding brief durations of increased load.

Do not exceed the recommended rated load. Resistor must use within the rated voltage range to prevent the shortening of service life and/or failure of the wound resistance elements.

Minimum load: Resistor must be utilized at 1/10 or more of the rated voltage to prevent poor conductance due to oxidation build-up. For basic particulars for cautions, refer to EIAJ Technical Report RCR-2121 "Guidance for care note on fixed-resistors".

