

Version:
December 01, 2022.

DEMINT

Electronics Co., Ltd.

(LRC) Metal Strip Chip Current Sense Resistor

Web: www.direct-token.com

Email: rfq@direct-token.com

DeMint Electronics Co., Ltd.

China: 17P, Nanyuan Maple Leaf Bldg., Nanshan Ave.,
Nanshan Dist., Shenzhen, Guangdong, China. 518054
Tel: +86 755 26055363

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,
New Taipei City, Taiwan. 248012
Tel: +886 2981 0109 Fax: +886 2988 7487

► Product Introduction

**DeMint (LRC) metal strip current sense chip resistor
save space, time, and cost.**

Features :

- Low TCR $\pm 50\text{PPM}/^\circ\text{C}$, $\pm 100\text{PPM}/^\circ\text{C}$.
- High Wattage Rating Up to 3W.
- Customized Resistance Available.
- Resistance Values from $0.5\text{m}\Omega$ to $15\text{m}\Omega$.
- Without Laser Trimmed with Very Low Inductance.

Applications :

- For NB power management.
- For MB power management.
- For Monitor power management.
- SWPS: DC-DC converter, Charger, Adaptor.

Providing design engineers with an economical low Ohmic value, metal strip current sense surface mount resistor with high quality performance, DeMint Electronics LRC Series is suitable for applications in the automotive sector for applications that require high power handling (Up to 3W) and low resistance $0.5\text{m}\Omega$.

From a certified supplier offering the automotive quality, DeMint's LRC Series gives all round superior performance for current sensing in lamp detection, mirrors, window lift, steering and seat controls.

As a first instance, the LRC Series displays enhanced power handling capabilities, against other technologies.

Thermal conductivity is important for chip resistors - little heat is dissipated directly into the air, and instead, is conducted out through the solder pads.

The heat generated from the specially constructed LRC resistor is more readily dispersed, therefore preventing localized heating, which contributes to TCR and thermal EMF errors, premature aging and possible scorching of the PC board.


The current sensing resistors (LRC) are rated for ambient operation from -55°C to $+170^\circ\text{C}$. The LRC Series is RoHS compliant and lead free.

Need more detail information about (LRC), please link to DeMint official website "[Current Sense Resistors](#)". Contact us with your specific needs.




► Construction & Dimensions

2512 Construction & Dimension (LRC) (Unit: mm)

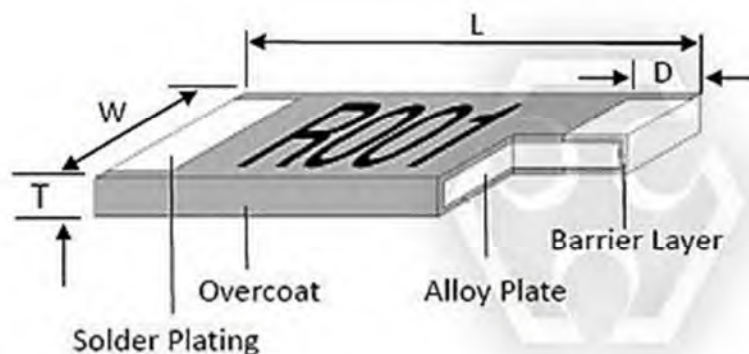


Black 2512 - Wave or IR reflow soldering

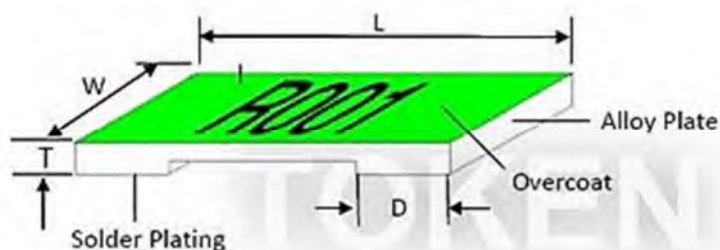

Green 2512 - IR reflow soldering only

1206 & 2010 Construction (LRC)


Type	Material
0M50 ~ R003	Manganese, Copper
3M5 ~ R010	Aluminum, Iron, Chromium

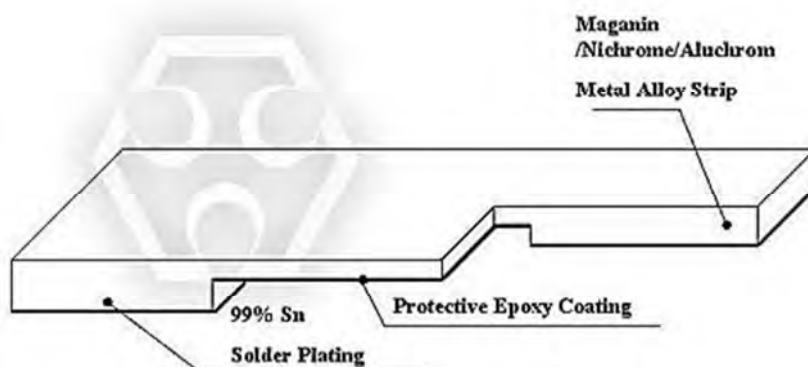

1206 & 2010 Construction

Chip 2512, 2010, 1206 Dimensions (LRC)

Type	Resistance (mΩ)	L(mm)	W(mm)	T(mm)	D(mm)	Weight(g) / 1000pcs
LRC06*TF0M50	0.50	3.20±0.25	1.60±0.10	0.60±0.20	1.35±0.25	22.6
LRC06*TD0M75	0.75	3.20±0.25	1.60±0.10	0.60±0.20	1.23±0.25	22.6
LRC06*T*****	1.0, 3.5, 4.0, 5.0, 6.0	3.20±0.25	1.60±0.10	0.60±0.20	1.10±0.25	22.6
LRC06*T*****	2.0, 3.0, 10	3.20±0.25	1.60±0.10	0.60±0.20	0.60±0.25	22.6
LRC06*T*****	1.2, 1.5, 7.0, 8.0, 9.0	3.20±0.25	1.60±0.10	0.60±0.20	0.90±0.25	22.6
LRC10*TEA0M50	0.5	5.08±0.25	2.54±0.15	0.60±0.20	2.17±0.25	42.3
LRC10*TDA0M75	0.75	5.08±0.25	2.54±0.15	0.60±0.20	2.04±0.25	42.3
LRC10*TDAR001	1.0	5.08±0.25	2.54±0.15	0.60±0.20	1.84±0.25	42.3
LRC10*TDA****	2.0, 6.0, 7.0, 8.0	5.08±0.25	2.54±0.15	0.60±0.20	1.54±0.25	42.3
LRC10*TDAR003	3.0	5.08±0.25	2.54±0.15	0.60±0.20	1.04±0.25	42.3
LRC10*TDA****	4.0, 5.0	5.08±0.25	2.54±0.15	0.60±0.20	1.84±0.25	42.3
LRC10*TDA****	9.0, 10	5.08±0.25	2.54±0.15	0.60±0.20	1.29±0.25	42.3
LRC12*T**0M50G	0.50	6.35±0.25	3.00±0.20	0.60±0.20	2.68±0.25	59.13
LRC12*T**0M75G	0.75	6.35±0.25	3.00±0.20	0.60±0.20	2.48±0.25	59.13
LRC12*T*****G	1.0, 6.0	6.35±0.25	3.00±0.20	0.60±0.20	1.93±0.25	59.13
LRC12*T*****G	1.5, 6.5, 7.0	6.35±0.25	3.00±0.20	0.60±0.20	1.43±0.25	59.13
LRC12*T*****G	2.0, 2.5, 3.0, 3.5	6.35±0.25	3.00±0.20	0.60±0.20	1.18±0.25	59.13
LRC12*T*****G	4.0, 4.5	6.35±0.25	3.00±0.20	0.60±0.20	2.18±0.25	59.13
LRC12*T*****G	5.0, 6.0	6.35±0.25	3.00±0.20	0.60±0.20	1.93±0.25	59.13
LRC12*T*****G	8.0 - 10	6.35±0.25	3.00±0.20	0.60±0.20	1.18±0.25	59.13
LRC12*T*****G	11 - 15	6.35±0.25	3.00±0.20	0.60±0.20	1.18±0.25	59.13
LRC12*T*0M50	0.50	6.35±0.254	3.18±0.254	1.25±0.20	1.30±0.38	184.11
LRC12*T*0M75	0.75	6.35±0.254	3.18±0.254	0.75±0.20	1.30±0.38	131.11
LRC12*T*R001	1.00	6.35±0.254	3.18±0.254	0.65±0.20	1.30±0.38	110.85
LRC12*T*1M50	1.50	6.35±0.254	3.18±0.254	0.45±0.20	1.30±0.38	67.16
LRC12*T*R002	2.00	6.35±0.254	3.18±0.254	0.35±0.20	1.30±0.38	49.30
LRC12*T*2M50	2.50	6.35±0.254	3.18±0.254	0.65±0.20	1.30±0.38	97.95
LRC12*T*R003	3.00	6.35±0.254	3.18±0.254	0.55±0.20	1.30±0.38	83.49
LRC12*T*R004	4.00	6.35±0.254	3.18±0.254	0.45±0.20	1.30±0.38	62.59
LRC12*T*R005	5.00	6.35±0.254	3.18±0.254	0.35±0.20	1.30±0.38	49.84
LRC12*T*R006	6.00	6.35±0.254	3.18±0.254	0.32±0.20	1.30±0.38	41.76
LRC12*T*6M50	6.50	6.35±0.254	3.18±0.254	0.30±0.20	1.30±0.38	35.85
LRC12*T*R007	7.00	6.35±0.254	3.18±0.254	0.27±0.20	1.30±0.38	34.01
LRC12*T*R010	10.00	6.35±0.254	3.18±0.254	0.25±0.20	1.30±0.38	25.97

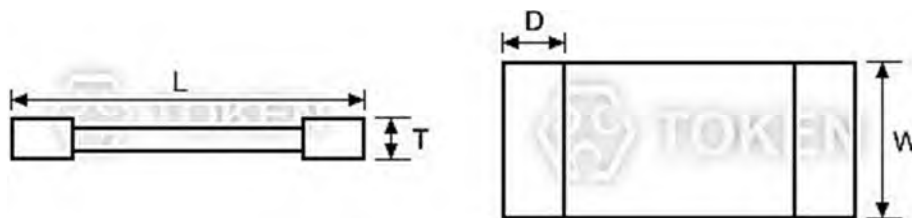

Chip 2512, 2010, 1206 Dimensions (LRC)

- Notice: DIRECT is capable of manufacturing the optional spec based on customer's requirement.

Electrical Specifications

Standard Electrical Specifications (LRC)

Type	Power Rating at 70°C	Operating Temp. Range	Resistance Tolerance (±%)	Resistance (mΩ)	TCR (±PPM/°C)
LRC06*TF0M50	1W	-55°C ~ +170°C	±1, ±3, ±5	0.5	±200
LRC06*TD****	1W			0.75 - 10	±50
LRC12*TD****	1W			0.5, 0.75, 1, 1.5, 2	±50
LRC12*TW****	1W			6, 6.5, 7	±75
LRC12*TE****	1W			4, 5, 10	±100
LRC12*TK****	1W			2.5, 3	±150
LRC12*TD****G	1W			11, 12, 13, 14, 15	±50

High Power Rating Electrical Specifications (LRC)

Type	Power Rating at 70°C	Operating Temp. Range	Resistance Tolerance (± %)	Resistance (mΩ)	TCR (±PPM/°C)
LRC10*TEA0M50	1.5W	-55°C ~ +170°C	±1, ±3, ±5	0.5	±100
LRC10*TDA****	1.5W			0.75 - 10	±50
LRC12*TDS****	2W			0.5, 0.75, 1, 1.5, 2	±50
LRC12*TWS****	2W			6, 6.5, 7	±75
LRC12*TES****	2W			4, 5, 10	±100
LRC12*TKS****	2W			2.5, 3	±150
LRC12*TDS****G	2W			6.5, 7, 8, 9, 10	±50
LRC12*TDB****G	2.5W			4, 4.5, 5, 6	±50
LRC12*TDR****G	3W			1, 1.5, 2, 2.5, 3, 3.5	±50
LRC12*TER****G	3W			0.5, 0.75	±100

● Remark : Operating Current $I = \sqrt{(P / R)}$, Operating Voltage $V = \sqrt{(P * R)}$




Environmental Characteristics

Environmental Characteristics (LRC)


Item	Specification		Test Method
	Black coating	Green coating	
Thermal Shock	±0.5%	±1%	-55°C~150°C, 100 cycles. MIL-STD-202 Method 107G
Short Time Overload	±0.5%	±1%	5*Rated Power for 5 seconds. JIS-C-5202-5.5
Endurance	±1%	±1%	70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs and 0.5 hrs
Dry Heat	±1%	±1%	at +170°C for 1000 hrs
Resistance to Soldering Heat	±0.5%	±1%	260±5°C, for 10 seconds. MIL-STD-202F Method 210E
Solderability	95% min coverage		245±5°C for 3 seconds. MIL-STD-202F Method 210E
Temperature Coefficient of Resistance	As Spec.		+25/-55/+25/+125/+25°C. MIL-STD-202 Method 304

- Rated continuous Working Voltage (RCWV) = $\sqrt{\text{Power Rating} \times \text{Resistance Value } (\Omega)}$ or Max. Operating voltage whichever is lower.
- Green coating can't be work with wave soldering bath.
- Humidity < 80% RH; Storage Temperature: 25±3°C

Soldering Condition (LRC)

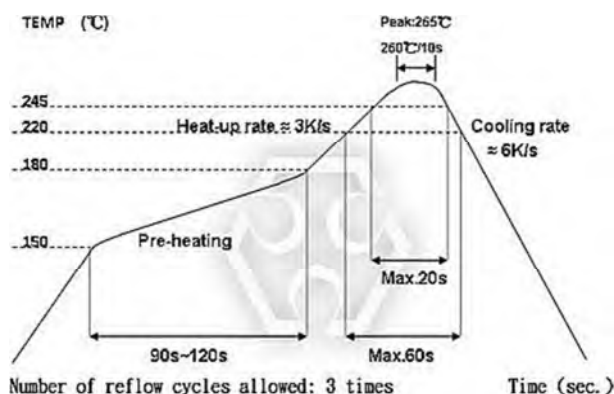


Green coating "Reflow Air Convection" is available
Green coating can't be working with wave soldering bath

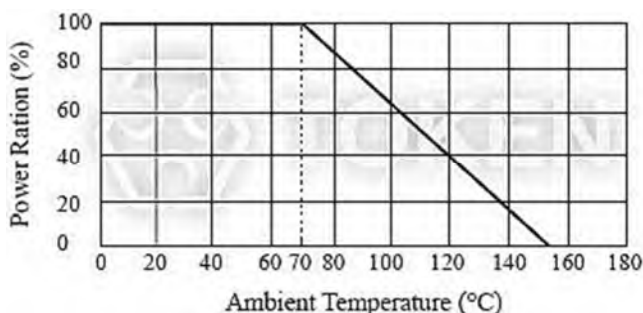

Power Derating Curve


► Pad Layout

4-Wire Precision Measurement (LRC)

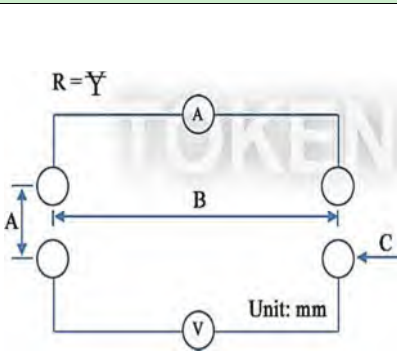Figure	Type	A	B	C	Excitation Current (A)	Resistance (Ω)
 4-Wire Precision Measurement	LRC12 Black Coating	1.5	5.4	Φ0.5	3A	0.5m ~ 1.5 m
	LRC12 Black Coating	1.5	5.4	Φ0.5	1A	2m ~10m
	LRC12 Green Coating	1.5	5.4	Φ0.5	3A	0.5m ~ 1.5m
	LRC12 Green Coating	1.5	5.4	Φ0.5	1A	2m ~ 15m
	LRC06	1.25	2.6	Φ0.5	3A	0.5m ~ 1.5m
	LRC06	1.25	2.6	Φ0.5	1A	2m ~ 10m
	LRC10	1.2	4.32	Φ0.5	3A	0.5m ~ 1.5m
	LRC10	1.2	4.32	Φ0.5	1A	2m ~ 10m


● Note: Equipment: ADEX AX-1152D DC Low Ohm Meter

4-Wire Pad Layout (LRC)

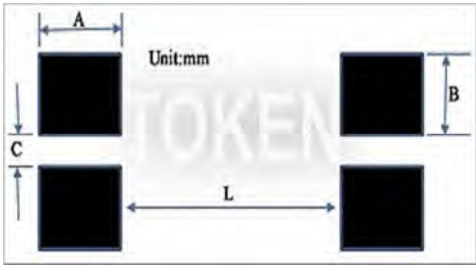Figure	Type	Resistance (Ω)	A	B	C	L
 Unit:mm 4-Wire Pad Layout (recommended for precision current sensing)	LRC12 Black Coating	-	1.0	2.7	2.95	1.45
	LRC12 Green Coating	0M50	3.13	1.2	1.0	0.52
		0M75	2.93	1.2	1.0	0.94
		R001	2.38	1.2	1.0	2.04
		1M5	1.88	1.2	1.0	3.04
		R002~3M5	1.63	1.2	1.0	3.54
		R004~4M5	2.63	1.2	1.0	1.54
		R005~R006	2.38	1.2	1.0	2.04
		6M5~R007	1.88	1.2	1.0	3.04
		R008~R015	1.63	1.2	1.0	3.54
	LRC10	0M50	2.61	1.045	0.8	0.60
		0M75	2.49	1.045	0.8	0.80
		R001	2.29	1.045	0.8	0.95
		R002	1.99	1.045	0.8	1.55
		R003	1.49	1.045	0.8	2.55
		R004~R005	2.29	1.045	0.8	0.95
		R006~R008	1.99	1.045	0.8	1.55
		R009~R010	1.74	1.045	0.8	2.05
	LRC06	0M50	1.80	0.7	0.5	0.55
		0M75	1.68	0.7	0.5	0.55
		R001	1.55	0.7	0.5	0.55
		1M2	1.35	0.7	0.5	0.95
		1M5	1.35	0.7	0.5	1.55
		R002~R003	1.05	0.7	0.5	1.55
		3M5~R006	1.55	0.7	0.5	0.55
		R007~R009	1.35	0.7	0.5	0.95
		R010	1.05	0.7	0.5	1.55

● Note: No circuits between pads to avoid short circuit


2-Wire Pad Layout (LRC)

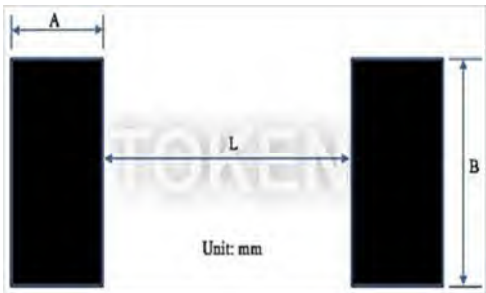Figure	Type	Resistance (Ω)	A	B	L
 Unit: mm 2-Wire Pad Layout	LRC12 Black Coating	-	2.7	3.6	2.95
	LRC12 Green Coating	0M50	3.13	3.4	0.52
		0M75	2.93	3.4	0.94
		R001	2.38	3.4	2.04
		1M5	1.88	3.4	3.04
		R002~3M5	1.63	3.4	3.54
		R004~4M5	2.63	3.4	1.54
		R005~R006	2.38	3.4	2.04
		6M5~R007	1.88	3.4	3.04
		R008~R015	1.63	3.4	3.54
	LRC10	0M50	2.61	2.89	0.60
		0M75	2.49	2.89	0.80
		R001	2.29	2.89	0.95
		R002	1.99	2.89	1.55
		R003	1.49	2.89	2.55
		R004~R005	2.29	2.89	0.95
		R006~R008	1.99	2.89	1.55
		R009~R010	1.74	2.89	2.05
	LRC06	0M50	1.80	1.90	0.55
		0M75	1.68	1.90	0.55
		R001	1.55	1.90	0.55
		1M2	1.35	1.90	0.95
		1M5	1.35	1.90	1.55
		R002~R003	1.05	1.90	1.55
		3M5~R006	1.55	1.90	0.55
		R007~R009	1.35	1.90	0.95
		R010	1.05	1.90	1.55

● Note: No circuits between pads to avoid short circuit

Reel & Tape

Emboss Plastic Tape Specifications (LRC)

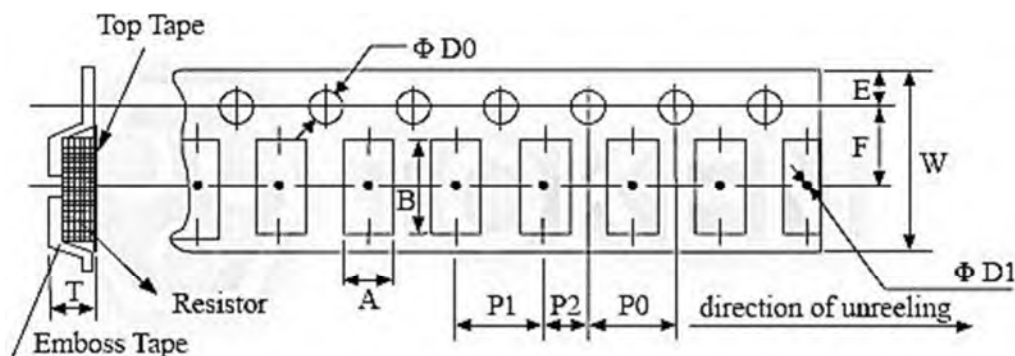

Emboss Plastic Tape Specifications

Type	Resistance (mΩ)	P0 (mm)	P1 (mm)	P2 (mm)	ΦD0 (mm)	ΦD1 (mm)	T (mm)
LRC06	0.5 - 10	4.0±0.1	4.0±0.1	2.0±0.05	1.55±0.05	1.0min	0.87±0.1
LRC10	0.5 - 10	4.0±0.1	4.0±0.1	2.0±0.05	1.55±0.05	1.4min	0.85±0.1
LRC12	0.50 - 0.75	4.0±0.1	4.0±0.1	2.0±0.05	1.55±0.05	1.4min.	1.45±0.2
	1 - 10	4.0±0.1	4.0±0.1	2.0±0.05	1.55±0.05	1.4min.	0.81±0.1
LR12 (G)	0.50 - 15	4.0±0.1	4.0±0.1	2.0±0.05	1.55±0.05	1.4min	0.85±0.1

- The cumulative tolerance of 10 sprocket whole pitch is ±0.2mm.
- Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- A & B measured 0.3mm from the bottom of the packet.
- t measured at a point on the inside bottom of the packet to the top surface of the carrier.
- Pocket position relative to sprocket hole is measured as the true position of the pocket and not the pocket hole.

Order Codes

Order Codes (LRC)

LRC	12	H	TR	D		R011	G
Part Type	Dimensions (L×W)(mm)	Resistance Tolerance (%)	Package	TCR (PPM/°C)	Power Rating (W)	Resistance (Ω)	Protective Coating
	12 6.3×3.1 EIA2512	J ±5	TR Taping Reel	D ±50	Standard	0m50 0.00050	Black Coating
	10 5.1×2.5 EIA2010	H ±3		W ±75	A 1.5	0m75 0.00075	Green Coating
	06 3.2×1.6 EIA1206	F ±1		E ±100	S 2	1m50 0.00150	G
				F ±200	R 3	R011 0.01100	**2010/1206 No coating / marking
				K ±150	B 2.5	R002 0.00200	
						R020 0.02000	

Resistance codes example (3 Marking)

Resistance	0.39mΩ	0.5mΩ	0.75mΩ	330mΩ	5.1Ω
Codes	M39	M50	M75	R33	5R1

Resistance codes example (4 Marking)

Resistance	1mΩ	1.5mΩ	2mΩ	7mΩ	10mΩ
Codes	R001	1M50	R002	R007	R010

► General Information

Your Current Options - DeMint Current Sense

As the world becomes more and more technology-driven, the uses for current sensing components will continue to increase. The need for even lower resistance value ranges is already becoming evident, as is the need for these resistors to handle more power. The industry-wide trend is the emergence of smaller and smaller products.

DeMint Electronics offers a wide variety of current sensing products from the industry to military standards, such as current sense in Thin-Film / Thick-Film Technology, Bare Element Resistors, and Open Air Shunts. This enables DeMint to present an astounding number of possible solutions for any circuit design needs.

Applications of Current Detecting Components

DeMint's TCS and CS Series unique form factor provides automotive designers with several advantages. Both TCS and CS Series are ideal for applications involving window lift motors, fuel pump systems, seat belt pretensioners, and pulse width modulator feedback.

The wider resistive element and lower resistance enables higher current to pass through the device. DeMint's LRC ultra low Ohmic metal strip chip series provides the inherent ability to flex slightly and offers stress relief during extreme temperature cycling on typical or metal substrates. This LRC series is suitable for switch power supply applications (DC-DC Converter, Charger, and Adaptor) and power management of monitor.

The open air design of bare element resistor LRA and LRB Series provide a far cooler operation by allowing more air flow under the resistive element to keep excess heat from being transmitted to the PC board. They are suitable for high power AC/DC detection of power supply circuit.

DeMint axial moulded BWL series provides power rating up to 10 watts and lower resistance 0.005Ω, is ideal for all types of current sensing applications including switching and linear power supplies, instruments and power amplifiers.

DeMint standard current sensing components can be replacement for Vishay, IRC, Ohmite, KOA, Yageo devices with fast delivery and more competitive price. Contact us with your specific needs.

