

Version:
December 01, 2022.

DEMINT

Electronics Co., Ltd.

(ZTAC/ZTTC)

SMD

Ceramic Resonators

Web: www.direct-token.com

Email: rfq@direct-token.com

DeMint Electronics Co., Ltd.

China: 17P, Nanyuan Maple Leaf Bldg., Nanshan Ave.,
Nanshan Dist., Shenzhen, Guangdong, China. 518054
Tel: +86 755 26055363

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,
New Taipei City, Taiwan. 248012
Tel: +886 2981 0109 Fax: +886 2988 7487

► Product Introduction

Introduction (ZTAC/ZTTC)

Features :

- High reliability chip resonator with high temperature withstanding ceramic case.
- Ultra-miniature size is suitable for compact equipment high mounting density.
- Low profile, Reflow solderable, Excellent solderability.

Applications :

- Car accessories.
- PDAs, PC peripherals.
- Camcorders, Digital cameras.

DeMint (ZTAC/ZTTC) series is the smallest surface mount ceramic resonators (Murata resonator CSAC/CSTC compatible). Previously, only higher cost quartz crystal resonators were considered for CAN bus application, due to tighter frequency tolerance requirements than for traditional automotive bus applications. Nowadays, DeMint utilizes the latest ceramic piezo technology freeing the design engineers from having to use these higher cost components and still achieve desired reliability and performance targets.



DeMint ZTAC and ZTTC series are the SMD ceramic resonators that meet the frequency tolerance $\pm 0.5\%$, temperature tolerance $\pm 0.3\% \sim \pm 0.4\%$, and aging tolerance $\pm 0.3\%$. The ZTAC and ZTTC covers the frequency range of 1.79 MHz to 50.00 MHz. ZTTC series features a built-in load capacitance. This feature eliminates any need for external loading capacitors and reduces component count, increases reliability and reduces size.

The ZTACxMG (3.2 × 1.3 mm) with (Max.) profile 1.0 mm and ZTACWxMX (2.5 × 2.0 mm) with (Max.) profile 1.5 mm are the smallest resonators for their respective frequency ranges. All ZTAC and ZTTC series are surface mount devices (SMD) with operating temperature range is -20°C to $+80^{\circ}\text{C}$.

Tolerance is the main key characteristics to evaluate for a resonator. The total tolerance is the addition of the initial tolerance, temperature tolerance and aging tolerance. Tighter tolerances are possible through design advancements, material refinement and manufacturing techniques. DeMint's design and material improve the temperature and aging characteristics of the resonator. DeMint's manufacturing ability sort to tighter initial tolerances.


Custom parts are available on request. DeMint will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to DeMint official website "[Ceramic Resonators](http://www.direct-token.com)".




► ZTAC Dimensions

Dimensions (ZTAC)


Part Number	Dimensions (Unit: mm)				
	L	W	H	P2	T
ZTACC*MG	7.4±0.2	3.4±0.2	1.8±0.2	1.2±0.2	5.0±0.3
ZTACP*MG	6.0±0.2	3.0±0.2	2.0 Max.	1.2±0.2	5.0±0.3
ZTACR*MG	4.5±0.2	2.0±0.2	1.2 Max.	0.8±0.2	3.0±0.2
ZTACE*MG	3.2±0.1	1.3±0.1	1.0 Max.	0.4±0.1	2.4±0.1
ZTACS*MT/MX	4.7±0.2	4.1±0.2	(1.2+A)±0.2	0.8±0.2	3.9±0.2
ZTACV*MT/MX	3.7±0.2	3.1±0.2	(1.0+A)±0.2	0.7±0.2	3.0±0.2
ZTACW*MX	2.5±0.2	2.0±0.2	1.5 Max.	0.4±0.2	2.0±0.2

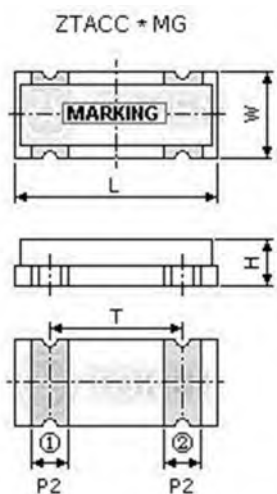


MHz (ZTACC*MG) Dimensions

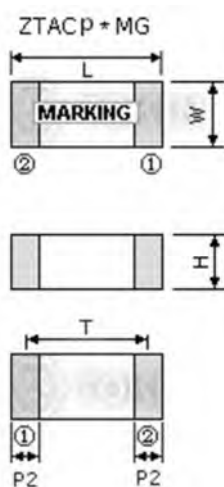


MHz (ZTACP*MG) Dimensions

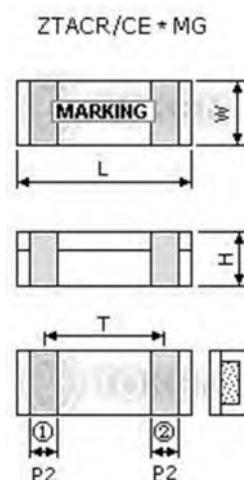

MHz (ZTACR/CE*MG) Dimensions

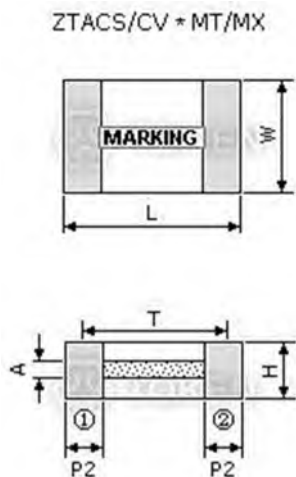

MHz (ZTACS/CV*MT/MX) Dimensions

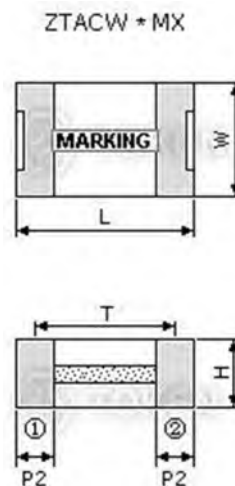

MHz (ZTACS/CV*MT/MX) Dimensions


① Input ② Output

- Note: A stands for thickness of the ceramic element, which varies with the frequency.
The range of the thickness is 0.1 to 0.7mm.


ZTTC Dimensions

Dimensions (ZTTC)


Part Number	Dimensions (Unit: mm)					
	L	W	H	P1	P2	T
ZTCC*MG	7.4±0.2	3.4±0.2	1.8±0.2	1.2±0.2	1.2±0.2	2.5±0.3
ZTTC*MG	6.0±0.2	3.0±0.2	2.0 Max.	1.2±0.2	1.2±0.2	2.5±0.3
ZTTCR*MG	4.5±0.2	2.0±0.2	1.2 Max.	0.8±0.2	0.8±0.2	1.5±0.2
ZTCE*MG	3.2±0.1	1.3±0.1	1.0 Max.	0.4±0.1	0.4±0.1	1.2±0.1
ZTCS*MT/MX	4.7±0.2	4.1±0.2	(1.2+A)±0.2	1.0±0.2	0.8±0.2	1.95±0.2
ZTTCV*MT/MX	3.7±0.2	3.1±0.2	(1.0+A)±0.2	0.9±0.2	0.7±0.2	1.5±0.2
ZTTCW*MX	2.5±0.2	2.0±0.2	1.5 Max.	0.5±0.2	0.4±0.2	1.0±0.2

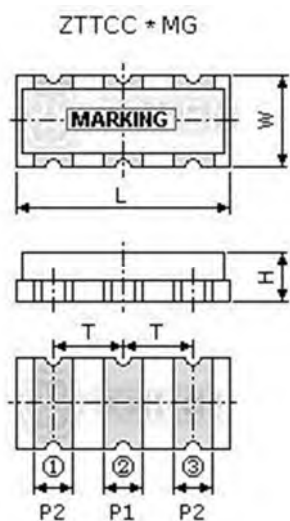


MHz (ZTCC*MG) Dimensions

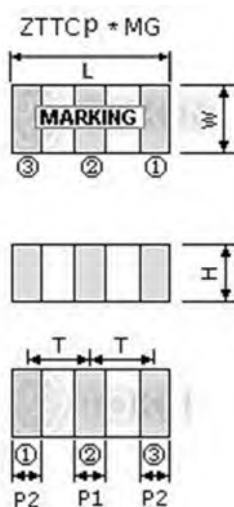


MHz (ZTTC*MG) Dimensions

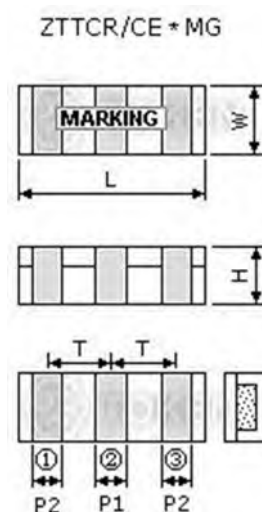

MHz (ZTTCR/CE*MG) Dimensions

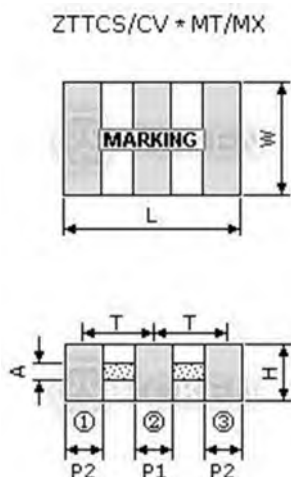

MHz (ZTCS/CV*MT/MX) Dimensions

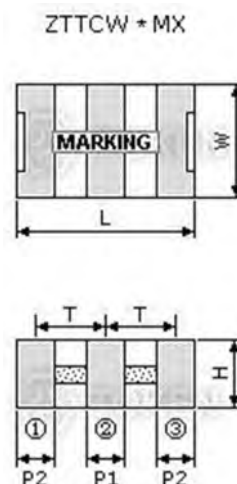

MHz (ZTCS/CV*MT/MX) Dimensions

① Input ② Ground ③ Output

- Note: A stands for thickness of the ceramic element, which varies with the frequency.
The range of the thickness is 0.1 to 0.7mm.

► Technical Characteristics


Technical Characteristics (ZTAC/ZTTC)

Part Number	Frequency Range (MHz)	Frequency Accuracy (%)	Stability in Temperature (-20°C ~ +80°C) (%)	Aging for Ten Years (%)
ZTACC*MG / ZTTCC*MG	1.79 ~ 8.00	± 0.5	± 0.3	± 0.3
ZTACP*MG / ZTTCP*MG	2.00 ~ 12.00	± 0.5	± 0.3	± 0.3
ZTACR*MG / ZTTCR*MG	4.00 ~ 8.00	± 0.5	± 0.3	± 0.3
ZTACS*MT / ZTTCS*MT	6.00 ~ 13.00	± 0.5	± 0.4	± 0.3
ZTACV*MT / ZTTCV*MT	8.00 ~ 13.00	± 0.5	± 0.4	± 0.3
ZTACE*MG / ZTTCE*MG	8.00 ~ 13.00	± 0.5	± 0.4	± 0.3
ZTACS*MX / ZTTCS*MX	13.01 ~ 50.00	± 0.5	± 0.3	± 0.3
ZTACV*MX / ZTTCV*MX	16.00 ~ 50.00	± 0.5	± 0.3	± 0.3
ZTACW*MX / ZTTCW*MX	20.00 ~ 45.00	± 0.5	± 0.3	± 0.3



▶ Test Circuit for MOS IC

Test Circuit for MOS IC (ZTAC/ZTTC)

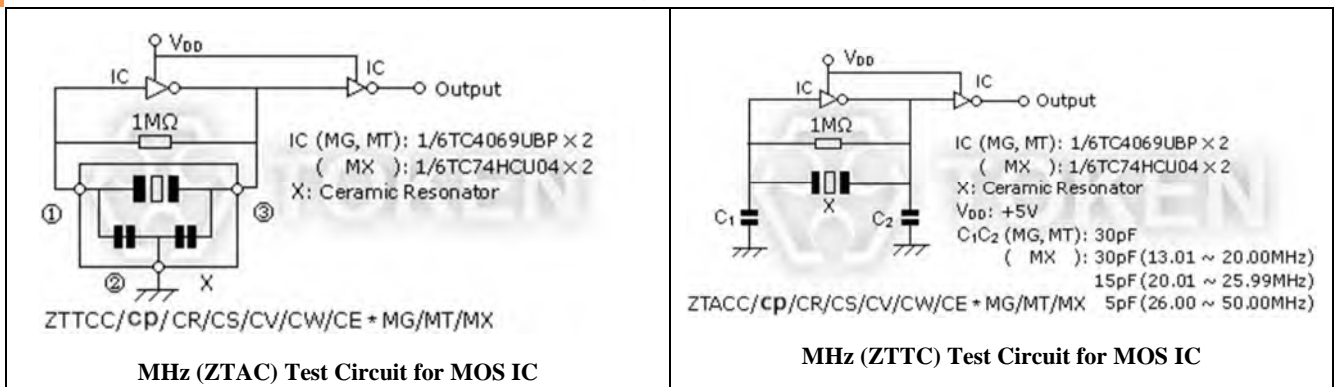

(ZTAC/ZTTC) Resonator Application - Oscillation Circuit for MOS IC

Feedback Resistor (R = 1MΩ):

A Feedback Resistor is used to determine the oscillation circuit bias. The feedback resistance will contribute to instability if it is too large by reducing feedback. Conversely, if it is too small, increases in current will be realized thereby reducing gain. Recent developments in IC design allows for the integration of the feedback resistor in many cases.

Bias resistor (R_b optional):

A Bias Resistor can be utilized in the resonator oscillation circuit to change the bias point when a reduction in IC gain is required, or to suppress unstable oscillation. This may be especially considered when a 3 stage buffered IC, or TTL IC, is used.

Damping Resistor (R_d optional):

Abnormal harmonic oscillation can be suppressed using a dampening resistor. The dampening resistor and load capacitors work together as a low-pass filter to reduce gain in the MHz range of oscillation.

Loading Capacitor (C₁ & C₂)

The stability of the oscillation circuit is mainly determined by the C₁ & C₂ values. If the load capacitance is too small, unstable oscillation will occur because of oscillation waveform distortion. If too high, a stop in oscillation can be expected. When comparing the same IC, oscillation circuits with lower frequencies require higher capacitance. DeMint Engineers can help with the circuit design if needed.

(ZTAC/ZTTC) Resonator Optimization - IC Evaluations

Tolerance is determined by the design of the resonator. However stability and correlation is determined by the IC evaluation. The microcontroller is evaluated with the resonators to determine the best possible circuit conditions to achieve stability and stable oscillation.

In addition, frequency correlation is measured to meet the tight initial frequency tolerance required. For the tight tolerance resonators the IC evaluation must be completed on the final circuit board layout. The final circuit boards provide the most accurate measurement of the frequency correlation.

This measurement will account for the effects of stray capacitance on the oscillation frequency. Once the correlation is determined the frequency of the resonator is adjusted to compensate for the correlation.




Recommended Land Pattern


Recommended Land Pattern (ZTAC/ZTTC)

Part Number	Dimensions (Unit: mm)			
	T1	T2	T3	W1
ZTACC*MG		1.7±0.3	5.0±0.3	4.0±0.3
ZTACR*MG		0.8±0.2	3.0±0.2	2.6±0.2
ZTACS*MT/MX		0.8±0.2	3.9±0.2	5.0±0.2
ZTACV*MT/MX		0.7±0.2	3.0±0.2	4.1±0.2
ZTACW*MX		0.5±0.2	2.0±0.2	2.6±0.2
ZTTC*MG	1.5±0.3	1.7±0.3	2.5±0.3	4.0±0.3
ZTTCR*MG	0.8±0.2	0.8±0.2	1.5±0.2	2.6±0.2
ZTTC*MT/MX	1.3±0.2	0.8±0.2	1.95±0.2	5.0±0.2
ZTTCV*MT/MX	1.0±0.2	0.7±0.2	1.5±0.2	4.1±0.2
ZTTCW*MX	0.5±0.2	0.5±0.2	1.0±0.2	2.6±0.2

RECOMMENDED
LAND PATTERN:



ZTACC/CR/CS/CV/CW/CE
* MG/MT/MX

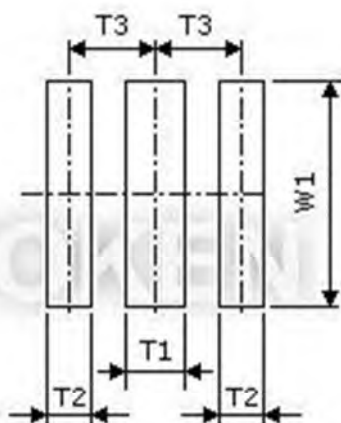

ZTTC/CR/CS/CV/CW/CE
* MG/MT/MX

MHz (ZTAC/ZTTC) Recommended Land Pattern

Order Codes

Order Codes (ZTAC/ZTTC)

ZTACC5.00MG	TR
Part Number	Package
	TR
	Taping Reel

General Information

DeMint Cuts Resonator Size and Cost

DeMint's Resonators are made of high stability piezoelectric ceramics that function as a mechanical resonator. This device has been developed to function as a reference signal generator. The frequency is primarily adjusted by the size and thickness of the ceramic element. With the advance of the IC technology, various equipment may be controlled by a single LSI (Large-Scale Integration) integrated circuit, such as the one-chip microprocessor.

Resonator can be used as the timing element in most microprocessor based equipment. In the future, more and more applications will use **ceramic resonator** because of its high stability non-adjustment performance, miniature size and cost savings.

Typical applications include TVs, VCRs, remote controls and toys, voice synthesizers, automotive electronic devices, copiers, telephones, cameras, communication equipment.

DeMint offers a full range of industry standard through hole and surface mount resonators both with and without internal capacitors. For standard Operating Temperatures (-20°C to 80°C), and for Automotive applications (-40°C to +125°C), with a wide range of frequencies and frequency stability options. Additionally, DeMint Application Engineering and Design capabilities allow for custom design and characterization requirements that meet the demands of most applications.

